


CC2530-CC2592EM Development Kit Quick Start Guide

Opening the Box and Running the Packet Error Rate Test

1. Kit Contents



- 2 x CC2530-CC2592 EM
- 2 x 2.4GHz Antennas
- Documentation



Caution! The kit contains ESD sensitive components. Handle with care to prevent permanent damage.

2. Hardware Requirements




The CC2530-CC2592EM is an add-on module that can be plugged onto a SmartRF05EB. To run the example in this Quick Start Guide, two SmartRF05 boards are required to establish an RF link between the evaluation modules.

More information about SmartRF05EB can be found here: www.ti.com/lit/pdf/swru210



The CC2530-CC2592EM can also be plugged into the SmartRF05 battery boards for standalone applications.

3. SmartRF05 Board Setup



Set the EM Selection switch in the position SOC/TRX. For best performance, it is recommended to turn off the RS232 interface.

4. Power Options

There are a few ways of applying power to the SmartRF05 board.

- 2 x 1.5V AA Alkaline Batteries
- USB
- External Power Supply

For the batteries and USB, there are voltage regulators on the SmartRF05 board that will set the on-board voltage to 3.3V. The external power supply should set a voltage that does not exceed 3.3V. **Note that there should be only one active power source at any given time.**




Select power source with jumper on header P11:

- Position 1-2 Batteries
- Position 2-3 USB or DC supply.

Once P11 is set, locate P8 switch on Smart05EB to power up the board.

5. Packet Error Rate Setup




After power up, the preloaded PER test application on the CC2530 will start. The LCD will display the screen as shown in the picture above. The number in the parentheses is the revision of the CC2530. Press Button S1 to enter the menu.

Note: if you don't see anything on the screen make sure the board is correctly powered (see step 5 and 6 above).


6. Select Channel



Select a channel between 11 and 26 (2405- 2480 MHz). The channel is selected by navigating the joystick to the right or left. Confirm the selection by pressing Button S1.




7. Select Mode




Select receiver on one of the SmartRF05EB's and transmitter on the other. Use the joystick to select mode. Confirm the selection by pressing Button S1.

8. RX: Select Gain




For the receiver select LNA gain on the CC2592 with the joystick. Either high gain or low gain mode are possible settings. Normally, high gain mode should be selected. Confirm the selection with Button S1. The receiver is now ready to receive packets.

9. TX: Select Output Power



On the transmitter node, select the TX output power (signal strength). Use the joystick (move right or left) to select the output power in dBm. Confirm the selection with Button S1.

10. TX: Select # of Packets




Select burst size (number of packets to send) by moving the joystick right or left. Confirm the selection with Button S1.

11. TX: Select Packet Rate




Select packet rate (number of packets transmitted per second) on the transmitter. Confirm the selection with Button S1.

12. TX: Start PER Test




The transmitter is now configured for the PER test. The PER test is started by pushing the joystick (as a button). The transmitter will display the number of packets sent during the PER test. The PER test is stopped by pushing the joystick again.

13. Display PER Information



The PER test receiver will display the PER value (number of lost and erroneous packets divided by the total number of packets sent, displayed as a fraction of 1000). It will also display a moving average RSSI value (received signal strength). The test can be reset by pressing Button S1.

14. SmartRF Studio



SmartRF® Studio supports the CC2530-CC2592. When the board is connected to the SmartRF05EB, it is possible to tick the CC2591 box in the "Range Extender" pane.

Studio will then make sure that I/O on the CC2530 is set up for proper control of the CC2592.

15. References

Please visit www.ti.com and <http://www.ti.com/tool/>

On the kit product page, you will find additional documentation, links to updated software examples and software tools like SmartRF Studio.

You will also find a lot of information on the TI E2E forum at <http://e2e.ti.com>

We hope that you will enjoy working with the CC2530-CC2592 combo design.


16. Troubleshooting

If you are experiencing problems with this test, please check the following:

- Nothing is shown in the display! Make sure the board is powered correctly.


Please visit the kit web page and check for updated SW and documentation.

1. Download and Install




Before connecting SmartRF05EB to your PC, download and install SmartRF Studio from www.ti.com/smarterfstudio.

2. Launch SmartRF Studio



After installing the tool, connect the EB to the PC using the USB cable and start SmartRF Studio. Select the "2.4 GHz" tab and double click the highlighted CC2530 device icon.

3. Test the Radio

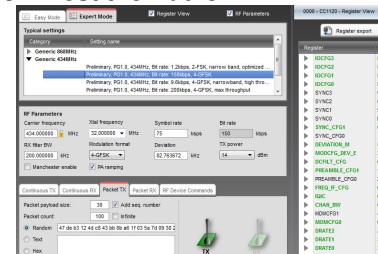

You can now configure the radio, run performance tests, export register settings and run link tests with another CC2530 on a SmartRF05EB connected to the PC.

IMPORTANT NOTICE FOR TI REFERENCE DESIGNS

Texas Instruments Incorporated ("TI") reference designs are solely intended to assist designers ("Buyers") who are developing systems that incorporate TI semiconductor products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products.

TI reference designs have been created using standard laboratory conditions and engineering practices. **TI has not conducted any testing other than that specifically described in the published documentation for a particular reference design.** TI may make corrections, enhancements, improvements and other changes to its reference designs.

Buyers are authorized to use TI reference designs with the TI component(s) identified in each particular reference design and to modify the reference design in the development of their end products. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI REFERENCE DESIGNS ARE PROVIDED "AS IS". TI MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE REFERENCE DESIGNS OR USE OF THE REFERENCE DESIGNS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. TI DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO TI REFERENCE DESIGNS OR USE THEREOF. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY BUYERS AGAINST ANY THIRD PARTY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON A COMBINATION OF COMPONENTS PROVIDED IN A TI REFERENCE DESIGN. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES, HOWEVER CAUSED, ON ANY THEORY OF LIABILITY AND WHETHER OR NOT TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, ARISING IN ANY WAY OUT OF TI REFERENCE DESIGNS OR BUYER'S USE OF TI REFERENCE DESIGNS.

TI reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques for TI components are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

Reproduction of significant portions of TI information in TI data books, data sheets or reference designs is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous failures, monitor failures and their consequences, lessen the likelihood of dangerous failures and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in Buyer's safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed an agreement specifically governing such use.

Only those TI components that TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components that have **not** been so designated is solely at Buyer's risk, and Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.